

Eaton's ECOLINE single bag filter housing is a light-weight design for commercial, OEM, non-hazardous, low-pressure applications that do not require a code stamp.

This single bag filter housing is a highly cost-effective solution for price-sensitive applications and features a handy V-clamp closure and threaded couplings. Units come standard with filter bag size 01, 02, 03 or 04 stainless steel restrainer baskets.

Features

- Side inlet with evacuation cover prevents spillage of unfiltered liquid, allowing for clean and easy filter bag change-outs
- V-clamp cover closure is easy to operate, allowing cover to be removed or closed quickly
- Compression hold down creates 360 degree sealing between the filter bag and the bag filter housing
- Designed with a 1/4" thread port on the lid for vent or gauge
- Smooth, bead-blasted finish makes it easy to completely clean the interior

Options

- Available in 316 stainless steel for high corrosion resistance
- Adjustable mounting legs for simplified installation
- Multiple I/O connections to suit application





Unique, internal body-to-basket O-ring seal prevents bypass and is easy to maintain


ECOLINE Single Bag Filter Housing

Applications

Coarse filtration > 500 µm	~
Medium filtration > 10 μm	
Fine filtration < 10 µm	
Pre-filtration	~
Safety filtration	
High volume	

High volume
Batch filtration
Circuit filtration
Continuous filtration

Solvents, paints
Fats and oils
Catalyst, activated carbon
Acids, bases
Petrochemicals
Water, waste water
Chemical industry
Pharmaceuticals
Metal cleaning
Automotive
Electronics

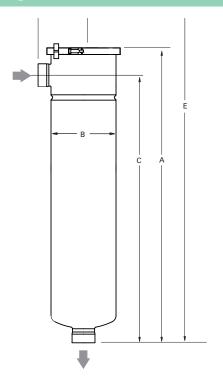

Dimensions inch (mm)

Models	Α	В	C	D	Е
EBF-0101	22.88 (581)	7.68 (195)	19.64 (489)	5.37 (150)	37.00 (940)
EBF-0102	38.50 (977)	7.68 (195)	35.19 (884)	5.37 (150)	68.00 (1727)
EBF-0103	14.56 (370)	4.50 (114)	11.81 (295)	3.50 (110)	24.00 (609)
EBF-0104	20.69 (525)	4.50 (114)	17.87 (454)	3.50 (110)	34.50 (876)

Dimensions for reference only and approximate. Exact dimensions for installation purposes available on request.

Technical data

Food and beverage
Paint and lacquer
Water treatment
Galvanic industry

Models	No. of filter bags	Size	Flow rate ¹ GPM (m³/h)	Max. pressure psi (bar)	Max. temp. °F (°C)	Housing volume gal (I)	Housing weight lb (kg)	I/O connections
EBF-0101	1	1	88 (20)	100 (6)	250 (120)	4.1 (15.5)	25 (7.5)	2" thread
EBF-0102	1	2	115 (26)	100 (6)	250 (120)	7.1 (27.0)	38 (11.0)	2" thread
EBF-0103	1	3	26 (6)	150 (9)	250 (120)	0.8 (3.0)	9 (3.5)	1 1/2" thread
EBF-0104	1	4	53 (12)	150 (9)	250 (120)	1.2 (4.5)	11 (4.5)	1 ¹ /2" thread

¹ Maximum theoretical flow based on water viscosity, filter bag specific.



For pricing and information please call Commercial Filtration Supply at **(855)-236-0467**

US EF-FBH-14 6-2015



