

Models: 792MFD, 794MFD, 796MFD**Ball-Plex™ Carbon Steel Flanged Ends
Duplex Strainers
Sizes: 2" – 6" (50 – 150mm)****Pressure/Temperature - Non-Shock**

Model	Material	Rating
792MFD	Carbon Steel	285psi @ -20 to 100°F
		19.6 bar @ 38°C
		260psi @ 200°F
		17.7 Bar @ 100°C
794MFD	Carbon Steel	740 psi @ -20 to 100°F
		51.1 bar @ 38°C
		680psi @ 200°F
		46.6 bar @ 100°C
796MFD	Carbon Steel	740psi @ -20 to 100°F
		51.1 bar @ 38°C
		680psi @ 200°F
		46.6 bar @ 100°C

* Max. temp. can be limited by gasket and seat material. Consult factory.

792MFD **Class 150**
794MFD **Class 300**
****796MFD** **Class 600**



Model 792MFD

⚠ WARNING

The 796MFD is a Class 300 Strainer drilled for Class 600 Flanges.

Bolted Covers required above 150 psi or 200°F.

Strainers provide positive and inexpensive protection for costly pumps, meters, valves, and other similar mechanical equipment by straining foreign matter from the connected piping system. Installation of a strainer before mechanical equipment can ensure trouble free service and avoid costly shutdowns for repair or replacement of equipment damaged by foreign matter. The size of the perforation or mesh in the basket screen will determine the smallest particles captured. See Strainer Information section of the Mueller Steam Specialty Engineering binder for detailed information including sizes and materials available.

Typical Service

- Duplex Strainers are designed for use in fluid handling systems where the flow cannot be shut down for basket cleaning.
- Typical services include cooling water, compressors, condensers, fire lines, fuel lines, lubrication systems, salt and fresh water systems, chemical process systems, pump suction service, and more.
- Consider strainer body and screen material as well as gasket and seat materials for suitability for particular service.

Features

- Ball-Plex™ Duplex Strainers use 3-way balls as the diverter valves
- Balls are 316SS for corrosion resistance, strength, and resistance to build-up of solids on the balls' surfaces.
- PTFE seats provide bubble-tight sealing, superior to metal seats in other designs. This eliminates potentially dangerous leakage into the chamber being cleaned.
- The pressurized chamber in use is covered by the handle. This prevents accidental opening of the pressurized chamber, and allows easy access to the chamber to be cleaned.
- NEW! Three Piece Design!
- Center body casting holds all moving parts. Baskets housings are identical and symmetrical around the body.
- After removal of either basket housing, all internal components are easily accessible for service, even with the unit still installed in line.

Baskets

- Large open area ratios ensure minimum pressure drop across the unit.
- See Pressure Drop Charts in the Technical Data section of the Mueller Steam Specialty Engineering binder.

MODEL	SIZES	STANDARD (WATER)	
		MATERIAL	OPENING
792MFD, 794MFD, 796MFD	2" – 4"	304SS	.062
	5" – 6"	304SS	.125

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

Material

	792MFD, 794MFD, 796MFD
Body	Carbon Steel A216-WCB
Cover	Carbon Steel A216-WCB
Seats	PTFE
O-Rings	BUNA

Pickling and passivation available on request, consult factory.


*Alternate seats and O-ring materials available.

Reference Standards

ASME B16.5 Pipe Flanges and Flanged Fittings

ASME B16.34 Valves - Flanged, Threaded and Welding End

Dimensions and Weights

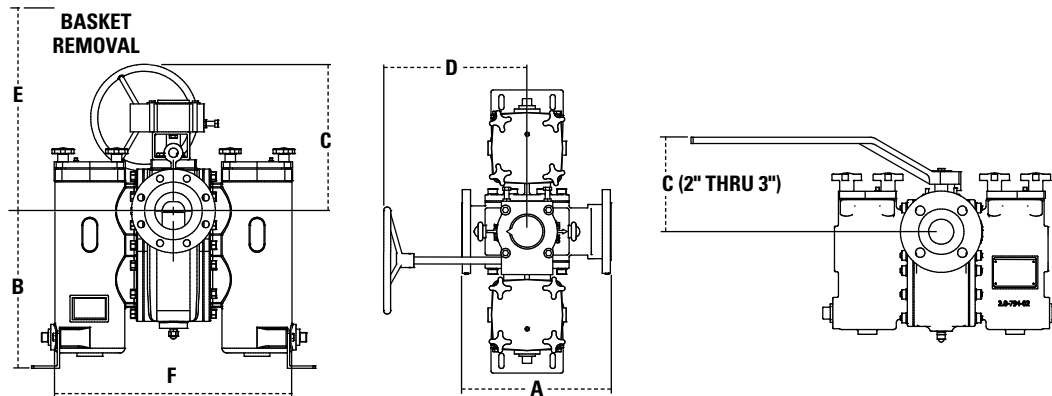

Models 792MFD, 794MFD

SIZE		DIMENSIONS												WEIGHT				C _v VALUE				
		A				B		C		D		E		F		G (NPT)						
		CLASS 150		CLASS 300																		
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kgs.	lbs.	kgs.			
2"	51	10 ⁵ / ₈	270	10 ⁵ / ₈	270	8 ³ / ₁₆	208	7 ¹ / ₂	191	20	508	12 ⁵ / ₈	321	16 ³ / ₈	416	11 ¹ / ₄	32	115	52	121	55	45
2 ¹ / ₂ "	64	13 ¹ / ₂	343	14 ¹ / ₄	362	12	305	8 ⁹ / ₁₆	211	20	508	18	457	21	533	1 ¹ / ₂	38	223	101	233	106	45
3"	76	13 ¹ / ₂	343	14 ¹ / ₄	362	12	305	8 ⁹ / ₁₆	211	20	508	18	457	21	533	1 ¹ / ₂	38	223	101	233	106	110
4"	102	16	406	16 ¹ / ₂	419	16 ⁷ / ₈	429	15 ³ / ₄	400	15 ³ / ₈	403	23 ³ / ₈	594	25 ¹ / ₂	648	1 ¹ / ₂	38	443	201	466	211	160
5"	127	22	559	22 ⁷ / ₈	581	18 ¹ / ₂	470	17 ¹ / ₂	445	15 ³ / ₈	403	23 ⁷ / ₈	606	26 ⁵ / ₈	276	1 ¹ / ₂	38	820	372	850	385	450
6"	152	22	559	22 ⁷ / ₈	581	18 ¹ / ₂	470	17 ¹ / ₂	445	15 ³ / ₈	403	23 ⁷ / ₈	606	26 ⁵ / ₈	276	1 ¹ / ₂	38	820	372	850	385	450

Mueller Steam Specialty product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Mueller Steam Specialty Technical Service. Mueller Steam Specialty reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Mueller Steam Specialty products previously or subsequently sold.



A Watts Water Technologies Company

USA: Tel: (800) 334-6259 • Fax: (800) 421-6772 • MuellerSteam.com

Latin America: Tel: (52) 81-1001-8600 • Fax: (52) 81-8000-7091 • MuellerSteam.com

ES-MS-792MFD_794MFD_796MFD 1435

© 2014 Mueller Steam Specialty