Get a Price Quote Today!

Filtration Products



LOFTOP[™] Coreless filter cartridges

Eaton's LOFTOP Coreless filter cartridges are suitable for a broad range of applications with high flow rates. LOFTOP Coreless filter cartridges are made of high purity polypropylene or polyamide 6.6 microfibers (melt blown).

Features and benefits

- Made of high purity polypropylene or polyamide 6.6 fibers (melt blown)
- No binders or adhesives
- Excellent chemical and thermal compatibility
- Beta rating of 5000, 99.98% efficiency
- Individually sealed in plastic foil
- High dirt-holding capacity
- FDA listed (U.S. CFR, Title 21) materials of construction for food and beverage contact

Design

Filter materials Polypropylene or polyamide 6.6 (melt blown)

Retention ratings 1, 5, 10, 20, 40, 70, 90, 120 μm @ 99.98% efficiency

Technical data

Nominal lengths 20", 40" (508, 1.016 mm)

Outside diameter 6" (152 mm)

Inside diameter 4.5" (114 mm)

Max. operating temperatures

Polypropylene: 176 °F (80 °C) Polyamide 6.6: 266 °F (130 °C)

Max. differential

pressures Polypropylene: 58 psid @ 77 °F (4.0 bar @ 25 °C) 14.5 psid @ 176 °F (1.0 bar @ 80 °C) Polyamide 6.6: 58 psid @ 90 °F (4.0 bar @ 32 °C) 14.5 bar @ 266 °F (1.0 bar @ 130 °C)


Recommended differential change-out pressure for disposal 35 psid (2.4 bar)



Liquid flow specification and dirt-holding capacity

Micron rating (µm)	1	5	10	20	40	70	90	120
Recommended flow rate l/min for water @ 25 °C (∆p 0.1 bar) for 40"	100	150	200	400	1,000	1,000	1,000	1,000
Recommended flow rate GPM/min for water @ 77 °F (∆p 1.45 psid) for 40"	26.4	39.6	52.8	105.7	264.2	264.2	264.2	264.2
Dirt-holding capacity (g)	700	800	800	800	1,000	1,200	3,500	3,500

Ordering code

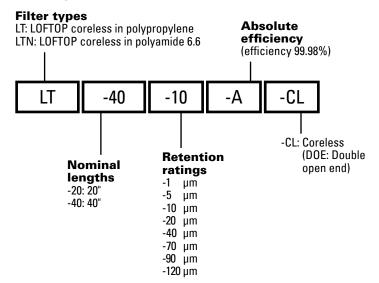



For pricing and information please call Commercial Filtraation Supply at (855)-236-0467

Request a Quote Today

© 2018 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.





