



## High-performance and cost-effective filter bags for *absolute* applications

Eaton's LOFCLEAR 500 filter bags are suitable for a wide range of applications such as the filtration of oils and slurries, dilute oil removal, process fluids with heavy contamination and many more.

LOFCLEAR 500 filter bags feature fully-welded, multi-pleated construction for high efficiency and long service life. This range has a pleated pre-filter and a complex arrangement of final filter layers, allowing the removal of difficult-to-filter gels and deformable particles with a high dirt-holding capacity. The webbed cover layer virtually eliminates any downstream fiber migration.

### Features and benefits

- Fully-welded construction with patented Santoprene™ SENTINEL® seal ring provides 100% bypass-free filtration
- High dirt-holding capacity of more than 2.2 lbs (1,000 g)
- Pleated pre-filter provides a very large filter area (approx. 32 ft² (3 m²))
- Material is free from silicone and crater-forming substances¹
- Eaton strongly recommends the use of an insertion tool that facilitates the insertion of the filter bag into the bag filter housing and ensures the correct alignment of the filter bag inside the restrainer basket

### Filter specifications

#### Material

Melt-blown polypropylene

#### Cover layer

Spunbond polypropylene

#### Seal ring

Welded Santoprene  
SENTINEL seal ring

#### Retention ratings²

2.6, 6, 13, 32 µm  
@ > 99% efficiency

### Dimensions/Parameters

#### Size

02: Ø 7 x 31" L (180 x 795 mm)

#### Filter area

02: 5.2 ft² (0.48 m²)  
(plus approx. 32 ft² (3 m²) pleated pre-filter)

#### Max. operating temperature

194 °F (90 °C)

#### Max. differential pressure

36.2 psi (2.5 bar)

#### Recommended change-out pressure for disposal³

11.6 – 21.7 psi (0.8 – 1.5 bar)

#### Max. flow rates⁴

02: 53 GPM (12 m³/h)




Powering Business Worldwide

# LOFCLEAR 500 Filter Bag Range

## Filter removal efficiency

Models	Particle sizes (µm) at common removal efficiencies (%)				$\Delta p$ psi (bar) size 02 @ 44 GPM (10 m³/h)	Max. operating temperature °F (°C)
	> 60%	> 90%	> 95%	> 99%		
522	0.5	1	1.5	2.6	1.9 (0.13)	194 (90)
525	1	2	3.5	6	1.2 (0.08)	194 (90)
527	2	5	9	13	0.1 (0.008)	194 (90)
529	10	20	23	32	< 0.1 (0.005)	194 (90)

## Ordering information

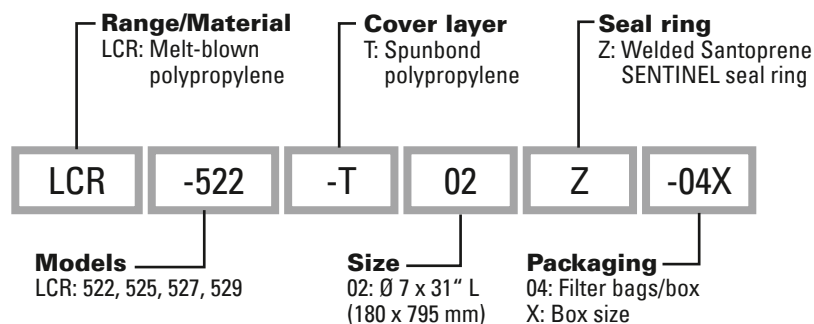

A pleated pre-filter offers a very large filter area (approx. 32 ft² (3 m²)), to retain gels and solids before they reach subsequent filter layers.

<sup>1</sup> Based on an accepted paint compatibility test (see document QUC-STA-10).

<sup>2</sup> Reference values based on single pass tests in ambient lab conditions with ISO test dust in water at 44 GPM (10 m³/h)/size 02.

<sup>3</sup> Depending on the respective application requirements.

<sup>4</sup> For liquids with a dynamic viscosity of 1 mPa·s @ 68 °F (20 °C).

Santoprene™ is a registered trademark of Exxon Mobil Corporation.

US  
EF-FTB-05c  
08-2014



Authorized Eaton Filtration Distributor & Representative

For pricing and information please call  
Commercial Filtration Supply at (855)-236-0467

Visit us Online at: [www.commercialfiltrationsupply.com](http://www.commercialfiltrationsupply.com)  
for more filtration products.



Powering Business Worldwide

