


Get a Price Quote Today!

LOFMEM™ G Series

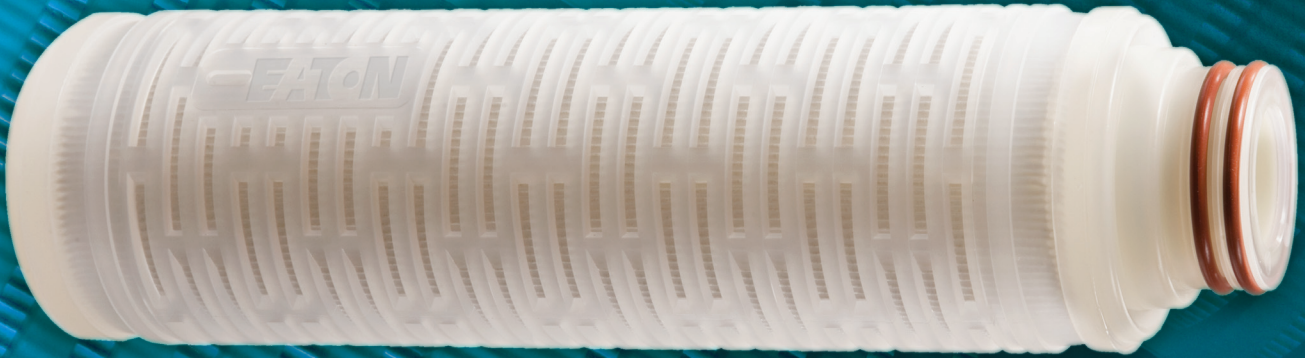

Absolute Rated Polyethersulfone Membrane Pleated Filter Cartridges

"LOFMEM-G cartridges from Eaton are inherently hydrophilic and are designed for a wide range of applications including: food & beverage, filtration of acids & bases, cosmetics, inks, chemicals, ultra-pure water and other aqueous solutions"

The LOFMEM-G pleated, disposable cartridge is one of the industry's most efficient and cost effective filters available. The absolute rated, hydrophilic, asymmetric polyethersulfone membrane features 7 square feet of surface area for a high system flow rate.

Features and Benefits

- Large membrane surface area for high throughput
- Longer on-line service reduces costly maintenance time
- Absolute rated membrane from 0.1 to 0.65 µm
- Manufactured in an ISO Class 7 cleanroom environment
- 100% flushed with 18 MΩ-cm DI water and bubblepoint tested

- Meets USP Class VI biological test for plastics
- Fixed pore construction eliminates dirt unloading as differential pressure increases
- Low extractables

Filter Specifications

Media

Asymmetric polyethersulfone membrane

Inner core, end caps, cage
Polypropylene

Support layers

Spunbond polypropylene

Gaskets/O-Rings

Buna-N, EPDM, Silicone, Viton®, Teflon® encapsulated Viton O-Rings

Micron ratings

0.1, 0.2, 0.45, 0.65 µm

Dimensions / Parameters

Nominal lengths

9.75", 10", 20", 30", 40"
(24.7, 25.4, 50.8, 76.2, 101.6 cm)

Outside diameter

2.7" (6.9 cm)

Inside diameter

1.0" (2.54 cm)

Surface area

7.0 ft². (0.65m²) per 10 inch element

Max. sustained operating temperature

180°F (82°C) at 20 psid (1.38 bar)

Max. differential pressure

60 psid @ 80°F (4.14bar @ 27°C)
30 psid @ 160°F (2.07 bar @ 71°C)
15 psid @ 200°F (1.03 bar @ 93°C)

Max. reverse differential pressure

40 psid @ 70°F (2.8 bar @ 21°C)

Recommended change-out pressure

35 psid (2.4 bar)



Powering Business Worldwide™

Performance Specifications

Hot DI water

Filter cartridge will withstand temperatures of 185°F (85°C) for up to 30 consecutive minutes.

Chemical compatibility

Filter cartridge resists most acids and bases, pH 1–14 and most oxidizing agents.

Sanitizing agents

Filter cartridge may be sanitized in place with common oxidizing agents.

Steam/Autoclave

Cartridges may be steamed or autoclaved for at least 5 one-hour cycles @ 275°F (135°C).


FDA Listed Materials

All polypropylene material used in manufacturing complies with the regulations of the Food and Drug Administration (FDA) title 21 of the Code of Federal Regulations Sections 174.5, as applicable for food and beverage contact.



The LOFMEM-G filter is available with a variety of gasket, O-ring and end cap configurations.

LOFMEM-G Flow Rate (70°F/21°C per 10" cartridge)

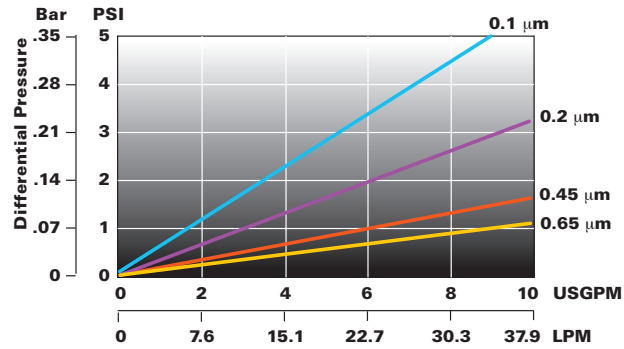

Filter Specification Code

| Nominal Length | Gasket or O-Ring |
|----------------|----------------------------|
| -9 9.75" | S Silicone |
| -10 10.0" | B Buna-N |
| -20 20.0" | E EPDM |
| -30 30.0" | V Viton |
| -40 40.0" | T FEP/Viton (O-Rings only) |

| | | | | |
|-----|-----|------|----|---|
| LMG | -10 | -0.1 | -3 | S |
|-----|-----|------|----|---|

| Retention Rating | End Configuration |
|------------------|--------------------------------------|
| -0.1 micron | DOE Double Open End |
| -0.2 micron | -1 226/Flat Single Open End |
| -0.45 micron | -2 222/Fin Single Open End |
| -0.65 micron | -3 226/Fin Single Open End |
| | -4 222/Flat Single Open End |
| | -10 Double Open End, Internal O-Ring |
| | -20 Single Open End, Internal O-Ring |

Filter Series
LOFMEM-G



A Division of Commercial Industrial Supply

For pricing and information please call

Commercial Filtration Supply at (855)-236-0467

Request a Quote Today

All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.



Powering Business Worldwide™