

Model: 791SA**Ball-Plex™ Cast Iron Screwed Ends
Duplex Strainers**
Sizes: 3/4" – 3" (20 – 80mm)**Pressure/Temperature–Non-Shock**

Model	Material	Rating
791SA	Cast Iron	175psi @ -20°F to 150°F 12.07 bar @ 65.56°C 150psi @ 250°F 10.34 bar @ 121.11°C

*Max. temp. can be limited by gasket and seat material. Consult factory.

791SA**Class 125**

Model 791SA

⚠ WARNING

Bolted Covers required above 150 psi or 200°F.

Strainers provide economical protection for costly pumps, meters, valves, and other similar mechanical equipment by straining foreign matter from the connected piping system. Installation of a strainer before mechanical equipment can ensure trouble free service and avoid costly shutdowns for repair or replacement of equipment damaged by foreign matter. The size of the perforation or mesh in the basket screen will determine the smallest particles captured. See Strainer Information section of the Mueller Steam Specialty Engineering binder for detailed information including sizes and materials available.

Typical Service

- Duplex Strainers are designed for use in fluid handling systems where the flow cannot be shut down for basket cleaning.
- Typical services include cooling water, compressors, condensers, fire lines, fuel lines, lubrication systems, salt and fresh water systems, chemical process systems, pump suction service, and more.
- Consider strainer body and screen material as well as gasket and seat materials for suitability for particular service.

Features

- Ball-Plex™ Duplex Strainers use 3-way balls as the diverter valves
- Balls are 316SS for corrosion resistance, strength, and resistance to build-up of solids on the balls' surfaces.
- PTFE seats provide bubble-tight sealing, superior to metal seats in other designs. This eliminates potentially dangerous leakage into the chamber being cleaned.
- Two part body casting allows true and easy in-line service
- After removal of the cover and basket, all working parts are easily accessible even with the unit in line.
- The handle covers the pressurized chamber. This prevents accidental opening of the pressurized chamber, and allows easy access to the chamber to be cleaned.

Baskets

- Large open area ratios ensure minimum pressure drop across the unit.
- See Pressure Drop Charts in Technical Data section of the Mueller Steam Specialty Engineering Binder.

MODEL	SIZES	STANDARD (WATER)	
		MATERIAL	OPENING
791SA	3/4" – 3"	304SS	.062 perf

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____


Approval _____

Representative _____

Material

	791FA
Body	Cast Iron ASTM A126-B
Cover	Cast Iron ASTM A126-B
Seats	PTFE
O-Rings	Buna-N

Dimensions and Weights

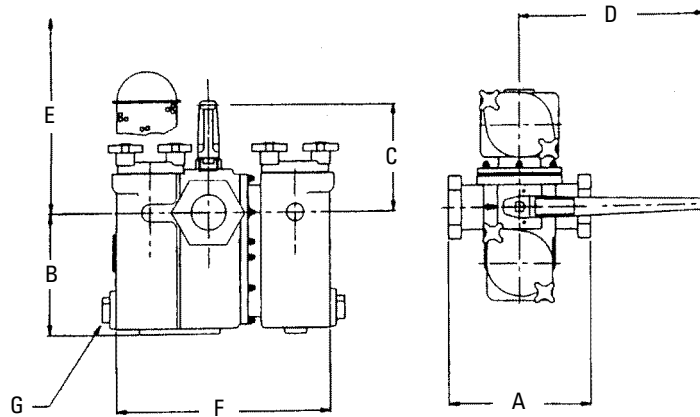

Model 791SA

SIZE		DIMENSIONS												WEIGHT			
		A		B		C		D		E Screen Removal		F		G (NPT)			
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kgs.
¾"	20	5½	140	4⅞	125	4⅝	118	10	254	7¾	197	10⅜	259	¾	20	30	13.6
1"	25	5½	140	4⅞	125	4⅝	118	10	254	7¾	197	10⅜	259	¾	32	30	13.6
1¼"	32	7½	191	6¾	171	4⅜	111.1	10	254	10⅝	264	12¾	324	1¼	32	53	24
1½"	40	7½	191	6¾	171	4⅜	111.1	10	254	10⅝	264	12¾	324	1¼	32	54	24
2"	50	10	254	8⅜	208	7⅞	181	20	508	12⅝	321	16⅜	416	1¼	40	105	47
2½"	65	11½	292	12	309	8⅞	205	20	508	17⅞	449	20⅝	518	1½	40	195	88
3"	80	11½	292	12	309	8⅞	205	20	508	17⅞	449	20⅝	518	1½	40	200	90

Apply For Certified Drawings.

Mueller Steam Specialty product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Mueller Steam Specialty Technical Service. Mueller Steam Specialty reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Mueller Steam Specialty products previously or subsequently sold.



A Watts Water Technologies Company

USA: Tel: (800) 334-6259 • Fax: (800) 421-6772 • MuellerSteam.com
Latin America: Tel: (52) 81-1001-8600 • Fax: (52) 81-8000-7091 • MuellerSteam.com